



# High Quality Annealed UHV Copper Gaskets (CUA)

High quality oxygen free annealed copper gaskets require lower tightening torque to make a leak tight seal. Recommended for use with items such as zero length viewports, gauge heads, and fragile ceramic feedthroughs.

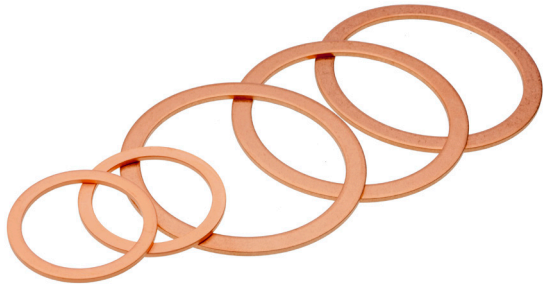

## Product Overview

- Oxygen free copper
- Designed for CF Flanges
- Surface etched
- Particulate free
- Individually packed
- Low tightening torque required
- Bakeable to 450°C
- Hardness 50 ± 5 VPN

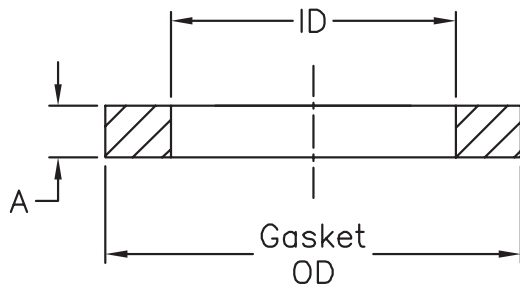

VACGEN's gaskets are manufactured from precision sheet material (to guarantee a consistent gasket thickness) and then inspected, cleaned and packed.

Annealed UHV Copper Gaskets (CUA Series)						
DN Type	Flange Size OD mm	Gasket OD mm	Gasket ID mm	Thickness A mm	Qty per Pack	Order Code
DN16	34	21.3	16	2	5	ZCUA19
N/A	53.8	32.8	25.4	2	5	ZCUA21
DN40	70	48.1	39	2	5	ZCUA38
N/A	85	61.6	51.1	2	5	ZCUA54
DN63	114	82.4	67.6	2	5	ZCUA68
N/A	117.5	91.6	76.2	2	5	ZCUA46
DN100	152	120.5	101.8	2	5	ZCUA100
DN160	203	171.3	152.6	2	5	ZCUA150
DN200	254	220.1	203.4	2	5	ZCUA200
DN250	305	270.1	254	2	5	ZCUA250
DN250	305	272.7	254.2	2	5	ZCUA250M
DN300	355.3	313.6	294.6	2	5	ZCUA14

All dimensions are nominal and subject to manufacturing tolerances