



# Commercial Grade Copper Gaskets (CUC)

High quality oxygen-free copper gaskets for commercial use. Designed for UHV applications. These can be purchased in bulk packs.

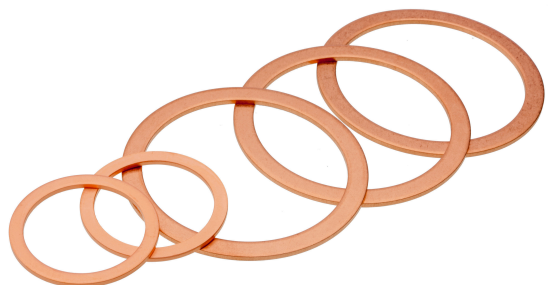

## Product Overview

- Oxygen free copper
- Designed for Conflat flanges
- Available in bulk packs up to DN160
- Low outgassing
- Bakeable to 450°C
- Hardness 60-82.5 VPN
- Unetched Surface

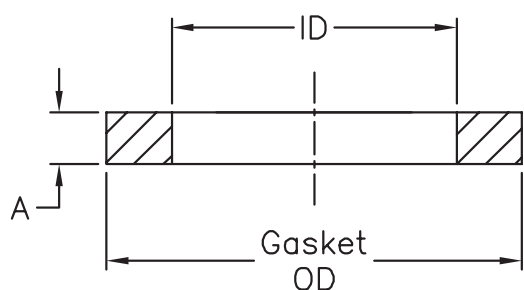

VACGEN's gaskets are manufactured from precision sheet material (to guarantee a consistent gasket thickness) and then inspected, cleaned and packed.

Commercial grade Copper Gaskets (CUC Series)								
DN Type	Flange Size OD		Gasket OD	Gasket ID	Thickness A	Qty per Pack	Weight	Order Code
	mm	Inch						
DN16	34	1.33	21.3	16	2	50	0.5	ZCUC19
DN40	70	2.75	48.1	39	2	50	1.0	ZCUC38
DN63	114	4.50	82.4	67.3	2	50	2.6	ZCUC68
DN100	152	6.00	120.5	101.6	2	50	4.5	ZCUC100
DN160	203	8.00	171.3	152.6	2	50	6.6	ZCUC150
DN200	250	10.00	220.1	203.4	2	5	0.7	ZCUC200
DN250	300	12.00	270.1	254	2	5	0.8	ZCUC250
DN300	362	14.25	321.1	305	2	5	0.9	ZCUC300

All dimensions are nominal and subject to manufacturing tolerances