


Tee piece (BT Series)

T-shape formed of three equally spaced flanges at 90° intervals. Two of these three flanges are rotatable enabling preferred orientation of vacuum equipment.



Product Overview

- Manufactured to ISO standards
- UHV Clean
- HV and UHV compatible
- All 304L stainless steel construction
- All tubulations are fully UHV compatible and bakeable to 450°C

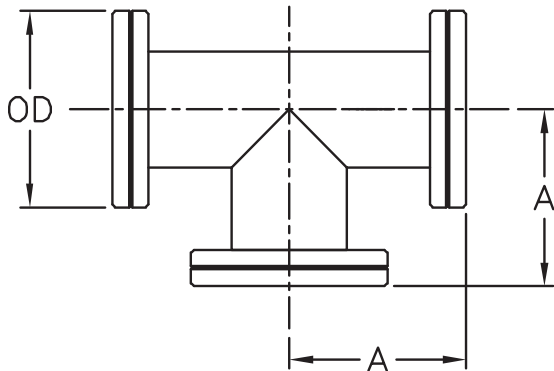

All VACGEN's components allow quick, easy and repeatable leak free joints and are designed for complete modularity for building simple high vacuum backing or pumping lines.

UHV Tees (BT Series)						
DN Type	OD mm	Dimension A mm	Minimum Bore mm	Number of Rotatable Flanges	Alignment & Number of Fixed Flanges	Order Code
DN19	34	38	15.7	2	1 Inline	ZBT19RI
DN19	34	38	15.7	2	1 Straddled	ZBT19RS
DN40	70	63	36.9	2	1 Inline	ZBT41RI
DN40	70	63	36.9	2	1 Straddled	ZBT41RS
DN63	114	105	58.9	2	1 Inline	ZBT64RI
DN63	114	105	58.9	2	1 Straddled	ZBT64RS
DN100	152	135	95.7	2	1 Inline	ZBT10RI
DN100	152	135	95.7	2	1 Straddled	ZBT10RS
DN150	203	167	146.5	2	1 Inline	ZBT15RI
DN150	203	167	146.5	2	1 Straddled	ZBT15RS