



# High Quality Surface Etched Copper Gaskets (CU)

High quality oxygen free surface etched copper gaskets for use in UHV applications. Available in small pack sizes.

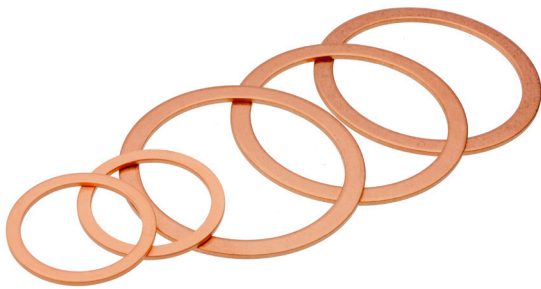

## Product Overview

- Oxygen free copper
- Suitable for conflat flanges
- Small pack sizes
- Low outgassing
- Bakeable to 450°C
- Super Clean Quality
- Hardeners 60-82.5 VPV

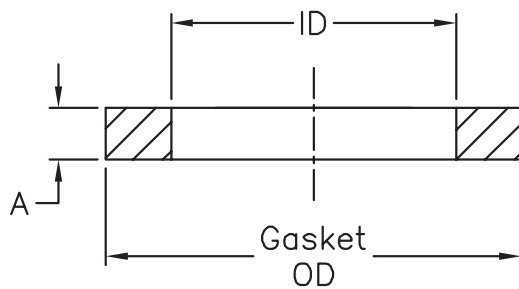

VACGEN's gaskets are manufactured from precision sheet material (to guarantee a consistent gasket thickness) and then inspected, cleaned and packed.

Copper Gaskets (CU Series)						
DN Type	Flange Size OD mm	Gasket OD mm	Gasket ID mm	Thickness A mm	Qty per pack	Order Code
DN16	34	21.3	16	2	10	ZCU19
DN25	53.8	32.8	25.4	2	10	ZCU21
DN40	70	48.1	39	2	10	ZCU38
DN54	85	61.6	51.1	2	10	ZCU54
DN63	114	82.4	67.6	2	10	ZCU68
DN76	117	91.6	76.2	2	10	ZCU46
DN100	152	120.5	101.8	2	10	ZCU100
DN130	171	141.5	127	2	5	ZCU67
DN160	203	171.3	152.6	2	5	ZCU150
DN200	254	220.1	203.4	2	5	ZCU200
DN150	305	270.1	254	2	5	ZCU250
DN250	305	272.7	254.2	2	5	ZCU250M
DN276	336	294	276	2	5	ZCU13
DN295	355	313.6	294.6	2	5	ZCU14
DN300	362	321.1	305	2	1	ZCU300S
DN300	362	321.1	305	2	5	ZCU300

All dimensions are nominal and subject to manufacturing tolerances